



STAINLESS STEEL 45° LIQUIDTIGHT CONNECTORS

APPLICATION

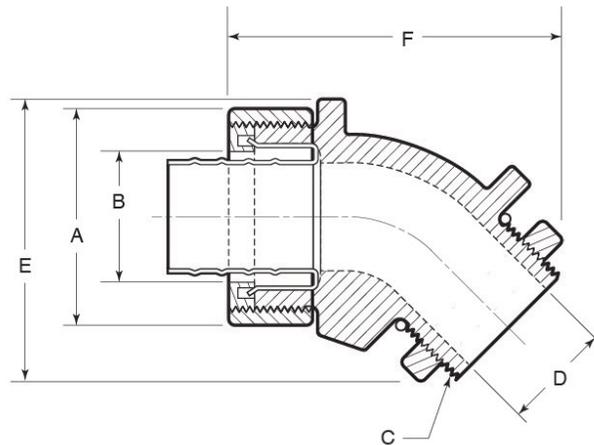

- Designed for use with liquidtight conduit
- Provide a means of connecting to boxes in wet or dry locations
- Offered in three configurations: Straight, 45°, 90°
- Supplied complete with a Type 316 SS gland nut, polyethylene sealing ring, Type 316 SS ferrule, neoprene sealing gasket, and Type 316 SS locknut
- Type 316 SS inside ferrule provides extra corrosion resistance on inside of fitting (Other inside ferrules made of materials such as carbon steel may corrode easily, effecting the entire fitting.)
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting



PRODUCT DETAILS

Material:

- Body: CF8M (316 SS)
- Locknut: 316 SS
- Sealing Gasket: Neoprene
- Inside Ferrule: 316 SS
- Sealing Ring: Polypropylene
- Nut: CF8M (316 SS)

Country of Origin:

100% Made in USA

| Part Number | Size | Weight/ 100 (lbs.) | Dimension (in.) | | | | | |
|-------------|-------|-----------------------|-----------------|------|--------------|------|------|------|
| | | | A | B | C | D | E | F |
| LT50-45 | ½ in. | 40 | 1.56 | 0.85 | ½ - 14 NPT | 0.62 | 1.75 | 2.36 |
| LT75-45 | ¾ in. | 55 | 1.70 | 1.07 | ¾ - 14 NPT | 0.79 | 1.92 | 2.50 |
| LT100-45 | 1 in. | 77 | 2.06 | 1.33 | 1 - 11-½ NPT | 1.00 | 2.32 | 3.82 |

