



STAINLESS STEEL LIQUIDTIGHT FLEXIBLE CONDUIT

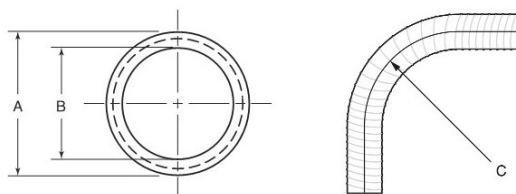

APPLICATION

- Provides a flexible and liquidtight means of protecting wiring and cable when making connections to rigid electrical conduit systems
- Used with liquidtight connectors to connect to a box, enclosure, or processing equipment
- Designed for wet locations
- Offered in two styles:
 - 316 SS Core with PVC Jacket
 - 316 SS Core with Antimicrobial, Food-Grade PVC Jacket
- Sold in any length, with deburred end
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and requires little maintenance or repair



PRODUCT DETAILS

LFMC:

Core: 316 SS
Jacket: Flexible PVC

Antimicrobial, Food-Grade LFMC:

Core: 316 SS
Jacket: Flexible PVC
(FDA Approved Compound)

Country of Origin:

Made in USA

Temperature Rating:

Standard
-22°F (-30°C) to 176°F (80°C) Dry /
140°F (60°C) Wet / 158°F (70°C) Oil

Food Grade

-22°F (-30°C) to 221°F (105°C) Dry /
140°F (60°C) Wet / 158°F (70°C) Oil

PVC-Jacketed SS LFMC (Gray)

----- Dimension (in.)-----					
Part Number	Size	Standard Lengths	Outside Diameter "A"	Inside Diameter "B"	Center Bend Radius "C"
LFMC50	½ in.	25', 50', 100'	0.83	0.63	3.42
LFMC75	¾ in.	25', 50', 100'	1.04	0.83	4.72
LFMC100	1 in.	25', 50'	1.30	1.06	6.15

Antimicrobial, Food-Grade PVC-Jacketed SS LFMC (Blue)

----- Dimension (in.)-----					
Part Number	Size	Standard Lengths	Outside Diameter "A"	Inside Diameter "B"	Center Bend Radius "C"
LFMC-FG50	½ in.	25', 50', 100'	0.83	0.63	3.42
LFMC-FG75	¾ in.	25', 50', 100'	1.04	0.83	4.72
LFMC-FG100	1 in.	25', 50'	1.30	1.06	6.15



© 2025 GIBSON STAINLESS & SPECIALTY INC. - REV 12/2025

PO BOX 847, GREENSBURG, PA 15601
PHONE: 1-800-945-4316 • FAX: 724-838-1544
WEB: GIBSONSTAINLESS.COM