



STAINLESS STEEL LB CONDUIT BODIES

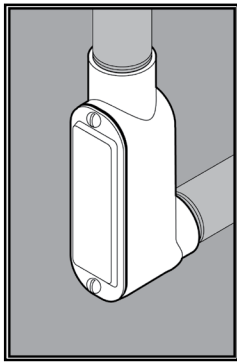

APPLICATION

- Designed to make 90° turns, change the route of conduit, and/or to make wiring pulls and connections
- Flat back design provides extra wiring capacity
- Form 8
- Offered in seven configurations: C, LB, LL, LR, T, TB, X
- Supplied complete with cover, gasket and Type 316 SS screws
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting

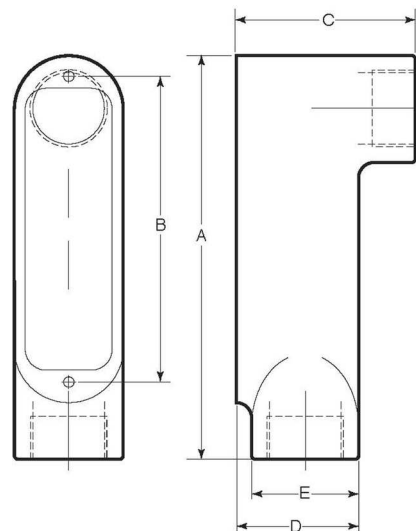

PRODUCT DETAILS

Material:

- Body: CF8M (316 SS)
- Cover, Screws: 316 SS
- Gasket: Neoprene

Country of Origin:

100% Made in USA

UL File Number:

QCIT.E300676
(Standard 514A)

Canada UL File Number:

DWTT7.E300676
(Standard 514A)

Part Number	Conduit Size	Weight/ Each (lbs.)	Dimension (in.)				
			A	B	C	D	E
7050LB	½ in.	1	5.09	3.50	2.28	1.38	1.18
7075LB	¾ in.	2	5.89	4.31	2.61	1.63	1.50
7100LB	1 in.	3	6.81	5.00	3.19	2.00	1.75
7125LB	1-¼ in.	5	7.75	6.00	3.50	2.49	2.15
7150LB	1-½ in.	5	8.54	6.58	3.91	2.74	2.30
7200LB	2 in.	9	10.81	8.50	4.69	3.38	2.73
7250LB	2-½ in.	9	12.72	9.75	6.09	4.25	3.26
7300LB	3 in.	18	14.00	11.25	6.53	4.63	4.00
7400LB	4 in.	28	16.60	13.75	7.20	5.56	5.13

